





TOMAS DE FUERZA

POWER TAKE-OFF/TOMADAS DE FORÇA



Lado izquierdo
Left side
Lado esquerdo



Lado derecho
Right side
Lado direito

PRIBZ-124303P // PRIBZ-124303 // PRIBZ-1243031 // PRIBZ-124303I

Eaton: FS-3205A/B, FS-4205A/B, FS-3005A/B, FS-4005A/B.

Datos Principales

Main Data


Dados Principais

Par nominal Torque (Nm) Torque (Nm)	Continuo Continuous Continuo	300
	Intermitente Intermittent Intermitente	420
Potencia (1000 RPM) Power Poder	42 C.V // 32 kW	
Lado de Montaje Mounting Position Lado de Montagem	Derecho / Izquierdo Right / Left Direito / Esquerdo	
Sentido de Giro de la Bomba Pump Rotation Direção de Rotação da Bomba	Izquierdo Anti-clockWise Esquerdo, contra-relógio	
Peso Weight Peso	9 Kg	
Relación Motor - Toma de Fuerza Engine to PTO Ratio Relação Motor - PTO	FS 3205 A/ FS 3005 A	1: 1
	FS 3205 B/ FS 3005 B	1: 1,14
	FS 4005 A/ FS 4205 A	1: 1
	FS 4005 B/ FS 4205 B	1: 1,14



TOMAS DE FUERZA

POWER TAKE-OFF/TOMADAS DE FORÇA

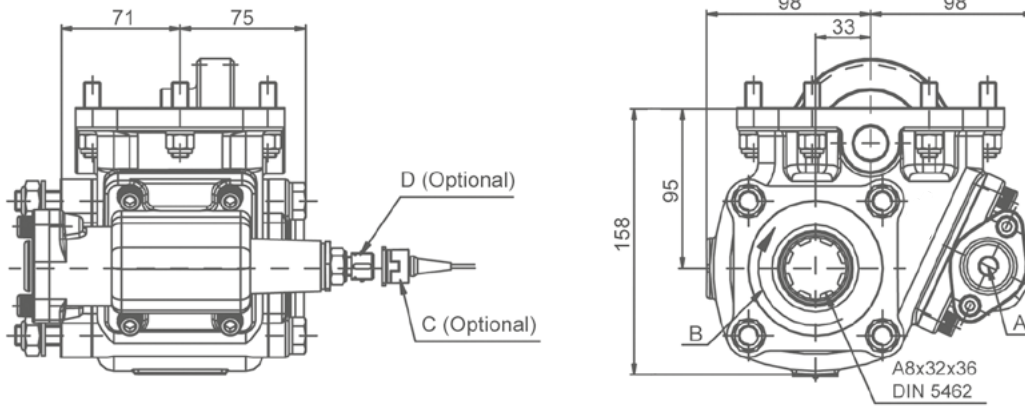

Notas

Notes
Notas


A	Toma de Aire, Rosca 1/4" GAS Air Connection, Thread 1/4" BSP Entrada de Ar, Rosca 1/4" BSP
B	Sentido de Giro Rotation Sentido de Rotação
C	Conector con 3m. de Cable (906599) Connector with 3m. of Cable (906599) Conector com 3m. de Cabo (906599)
D	Indicador de Funcionamiento (100070001) Passing Contact Switch. P/N (100070001) Indicador de Operação (100070001)

Tipos de Salida

Output Types
Tipos de Saídas

PLATO/FLANGE/PRATO

TIPO DE PLATO	
FLANGE TYPE	
TIPO DE PRATO	
SAE:	1100
	1300
	1400
DIN:	90
	100
Thai Flange	
Kyukoto Flange	

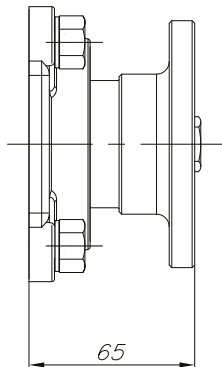

EJE/SHAFT/EIXO

