



ADAPTADORES

ADAPTERS/ADAPTADORES




PRIBZ-103404

KIT ZF 16-1650 / 220 / 221

Especificaciones Técnicas Technical Specifications Especificações Técnicas

Par Nominal Torque	Continuo Continuous Continuo	300			
	Intermitente Intermittent Intermitente	420			
Potencia (1000 r.p.m) Power Poder		42 C.V // 32 kW (1000 r.p.m)			
Aplicación Application Aplicação		Toda la gama de tomas de fuerza de la serie ZF S6-90 The full range of power take-offs of the series ZF S6-90 Toda a gama de tomadas de força da série ZF S6-90			
Peso Weight Peso		1.6 Kg			
Relación Motor - Toma de Fuerza Engine to PTO Ratio Relação		16S-160	/11.46	Larga High Longa	1: 0,963
				Normal	1: 0,820
			/13.68	Larga High Longa	1: 0,963
				Normal	1: 0,820
			/14.29	Larga High Longa	1: 0,911
				Normal	1: 0,740
		/17.06	Larga High Longa	1: 0,911	
			Normal	1: 0,740	
		16S-190	/11.46	Larga High Longa	1: 0,957
				Normal	1: 0,820
			/13.68	Larga High Longa	1: 0,963
				Normal	1: 0,820
16S-220	/13.80	Larga High Longa	1: 0,963		
		Normal	1: 0,820		
/16.47	Larga High Longa	1: 0,963			
	Normal	1: 0,820			

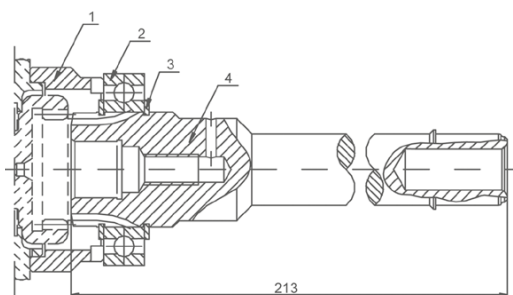

1	Separador / Spacer / Espaçador
2	Rodamiento de Bolas 6009 / 6009 Ball Bearing / Rolamento de Esferas 6009
3	Anillo Seeger DIN 471 / Circlip DIN 471 / Anel Seeger DIN 471
4	Eje Adaptador / Adapter Shaft / Eixo Adaptador